## SRY-Sincere, Responsible, Young CE, RoHS, FCC, CB, ETL Certificated

#### Specification

|                           | P4                         | P5                         | P6                         | P8                         | P10            |
|---------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------|
| Pixel Pitch               | 4mm                        | 5mm                        | 6mm                        | 8mm                        | 10mm           |
| Density                   | 62,500 dots/m <sup>2</sup> | 40,000 dots/m <sup>2</sup> | 22,477 dots/m <sup>2</sup> | 15,625 dots/m <sup>2</sup> | 10,000 dots/m² |
| Led Type                  | SMD1921                    | SMD1921                    | SMD2727                    | SMD3535                    | SMD3535        |
| Panel Size                | 768 x 768mm                | 960 x 960mm                | 960 x 960mm                | 1024 x 1024mm              | 960 x 960mm    |
| Drive Method              | 1/16 Scan                  | 1/8 Scan                   | 1/8 Scan                   | 1/4 Scan                   | 1/2 Scan       |
| Best Viewing Distance     | 4-40m                      | 5-50m                      | 6-60m                      | 8-80m                      | 10-100m        |
| Brightness                | 5000 nits                  | 5000 nits                  | 5500 nits                  | 6000 nits                  | 6500 nits      |
| Average Power Consumption | 400W                       | 400W                       | 350W                       | 300W                       | 300W           |
| Best Viewing Angle        | H 140°, V140°              |                            |                            |                            |                |
| Input Voltage             | AC110V/220V ±10%           |                            |                            |                            |                |
| Waterproof Level          | Front IP65, Rear IP54      |                            |                            |                            |                |
| Control Method            | WIFI/4G/USB/LAN            |                            |                            |                            |                |
| Life Span                 | 100,000 hours              |                            |                            |                            |                |
| Certificates              | CE, RoHS, FCC              |                            |                            |                            |                |



### SRYLED - Fixed LED Display

Fixed LED display is one of main advertising ways nowadays, it is widely used for outdoor application, such as shopping mall, airport, station, plaza etc.



Highway / Airport / Plaza P2.5 / P3 / P4 / P5 / P6 / P8 / P10

SRYLED

# SRYLED Audio · Visual · Solutions

SHENZHEN SRYLED PHOTOELECTRIC CO., LTD.

Tel.:+86-755-84660806 Mobile/WhatsApp: +86-15013698328

Address: Building C, Huixin Industrial Park, Fuyong Town, Bao'an District, Shenzhen, China.

SHENZHEN SRYLED PHOTOELECTRIC CO., LTD.

Shenzhen Sryled Photoelectric Co., Ltd.

- www.sryled.com

SRYLED


Shenzhen Sryled Photoelectric Co., Ltd.

SHENZHEN SRYLED PHOTOELECTRIC CO., LTD.

### SRYLED - Fixed LED Display


Fixed LED display is one of main advertising ways nowadays, it is widely used for outdoor application, such as




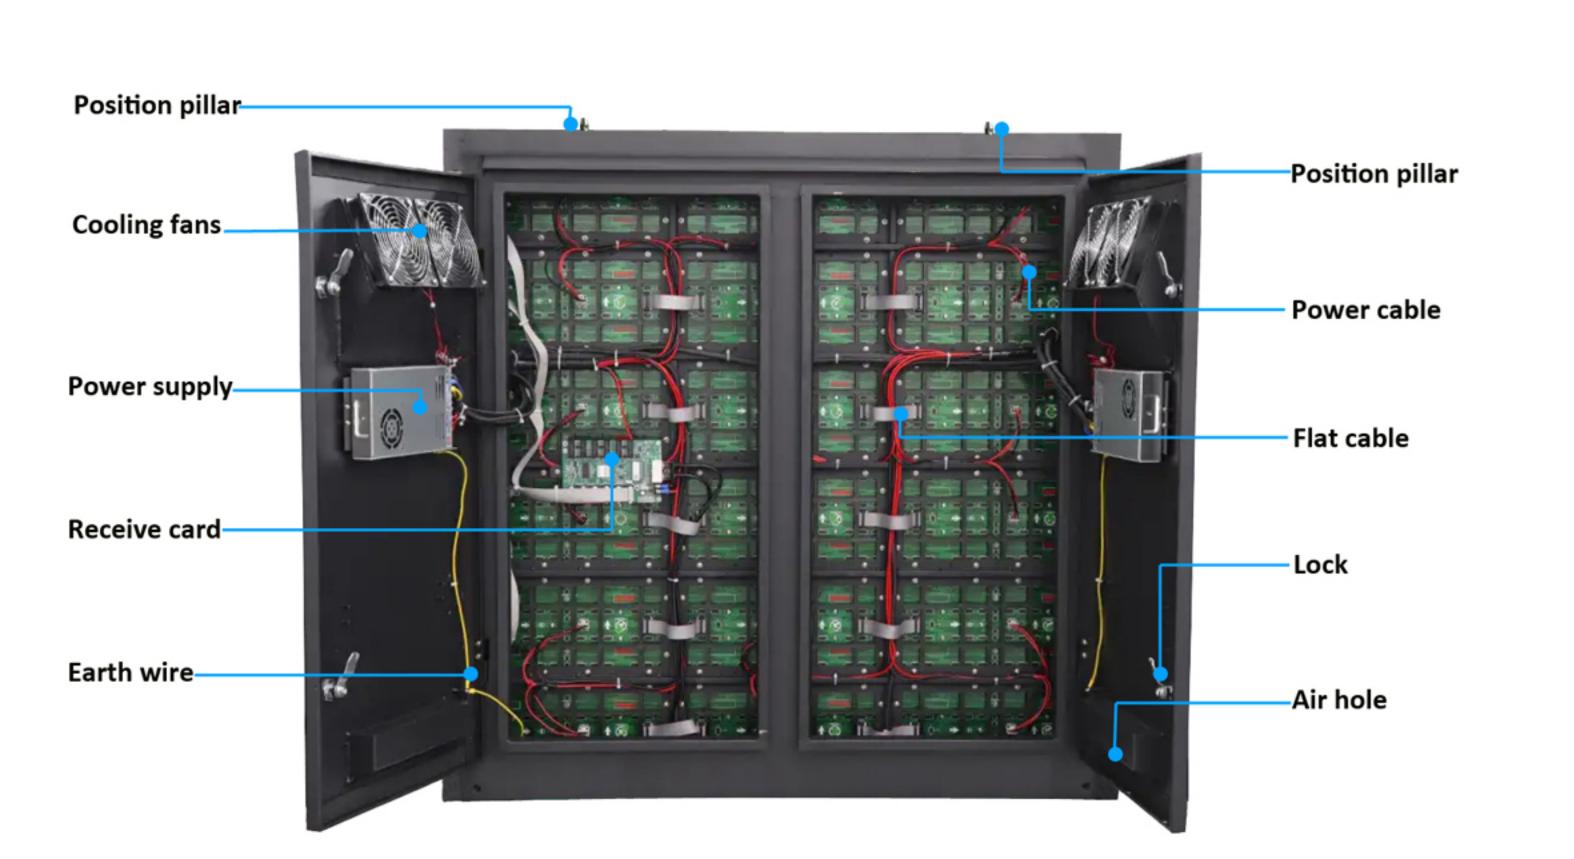

### HIGH BRIGHTNESS


Outdoor advertising LED display model has P3 P4 P5 P6 P8 P10 P16, brightness can up to 7500 nits, they can be sawed clearly even under strong sunlight. And brightness can be adjust automatically according to surrounding environment if install a light sensor.

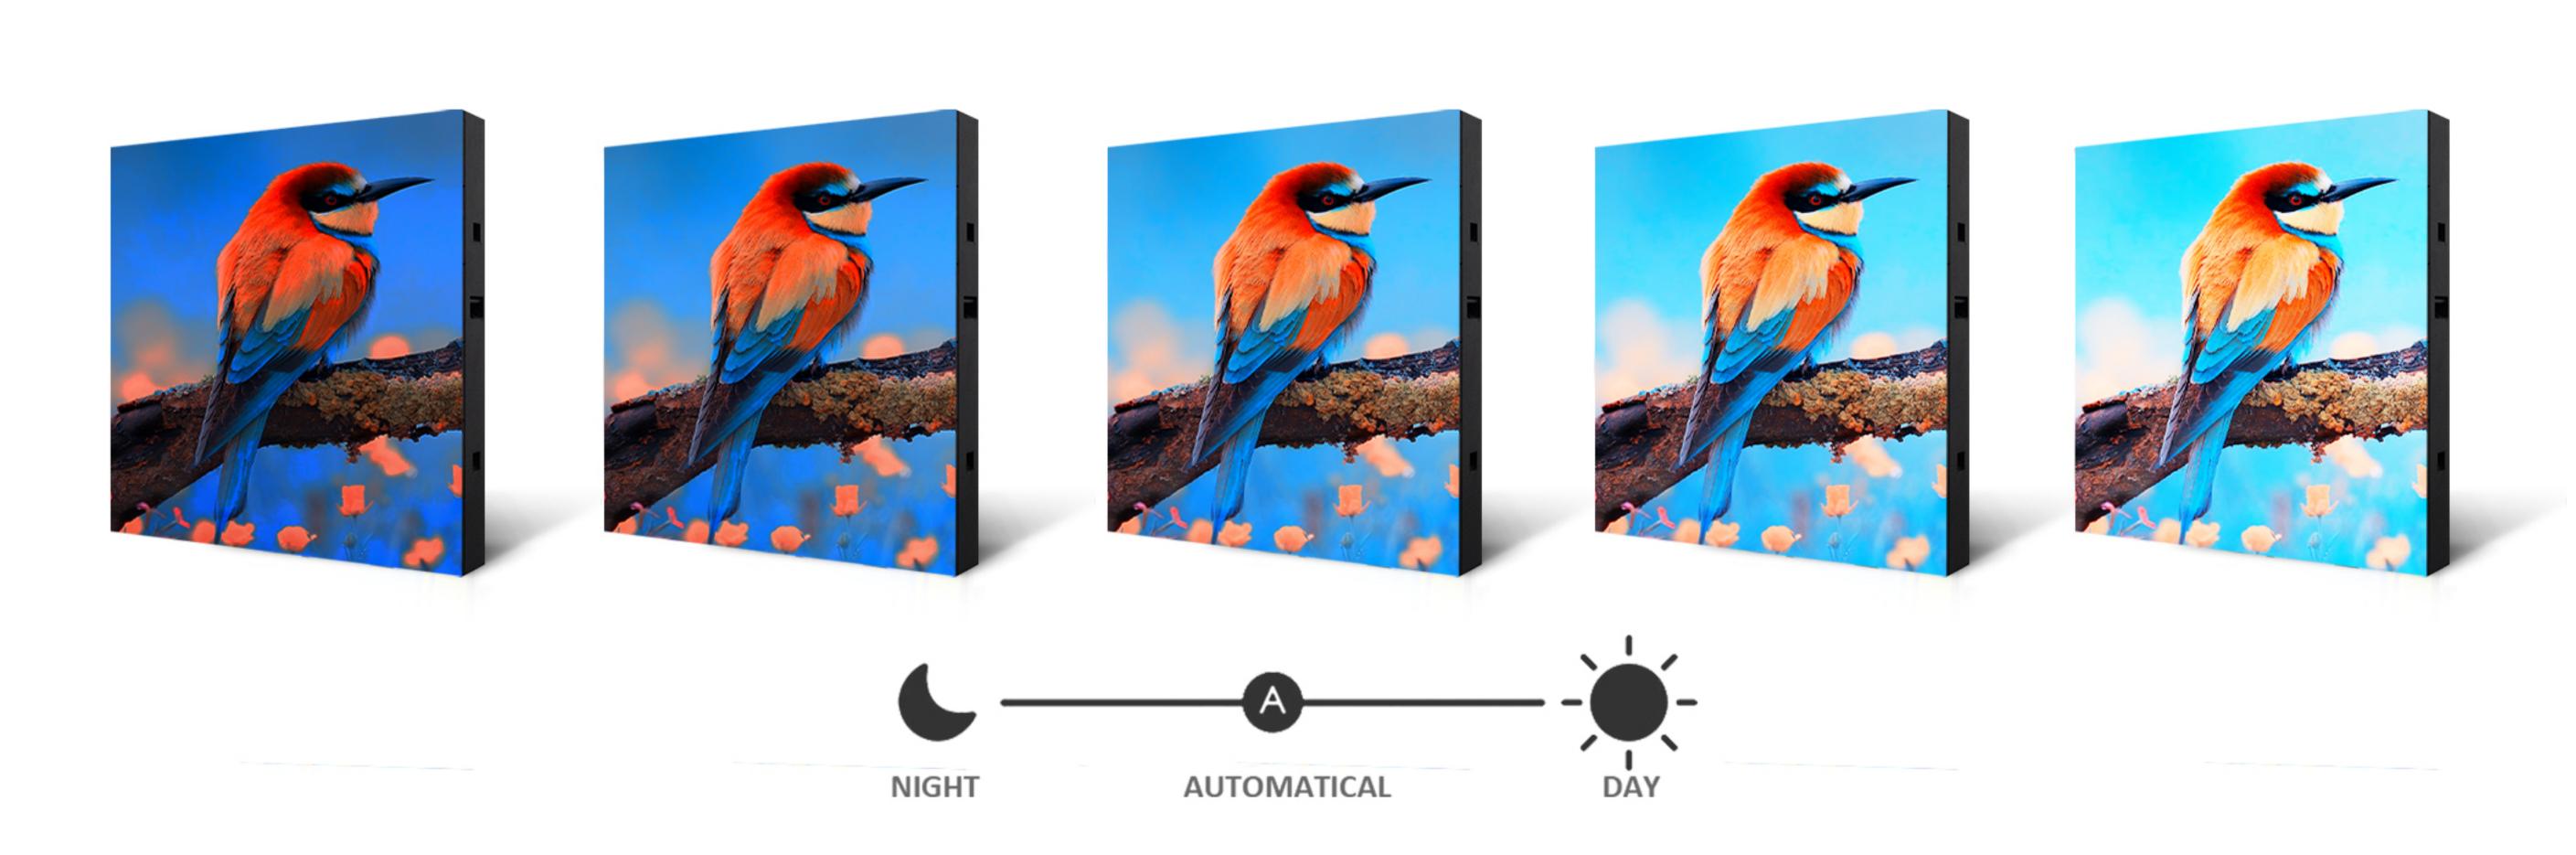

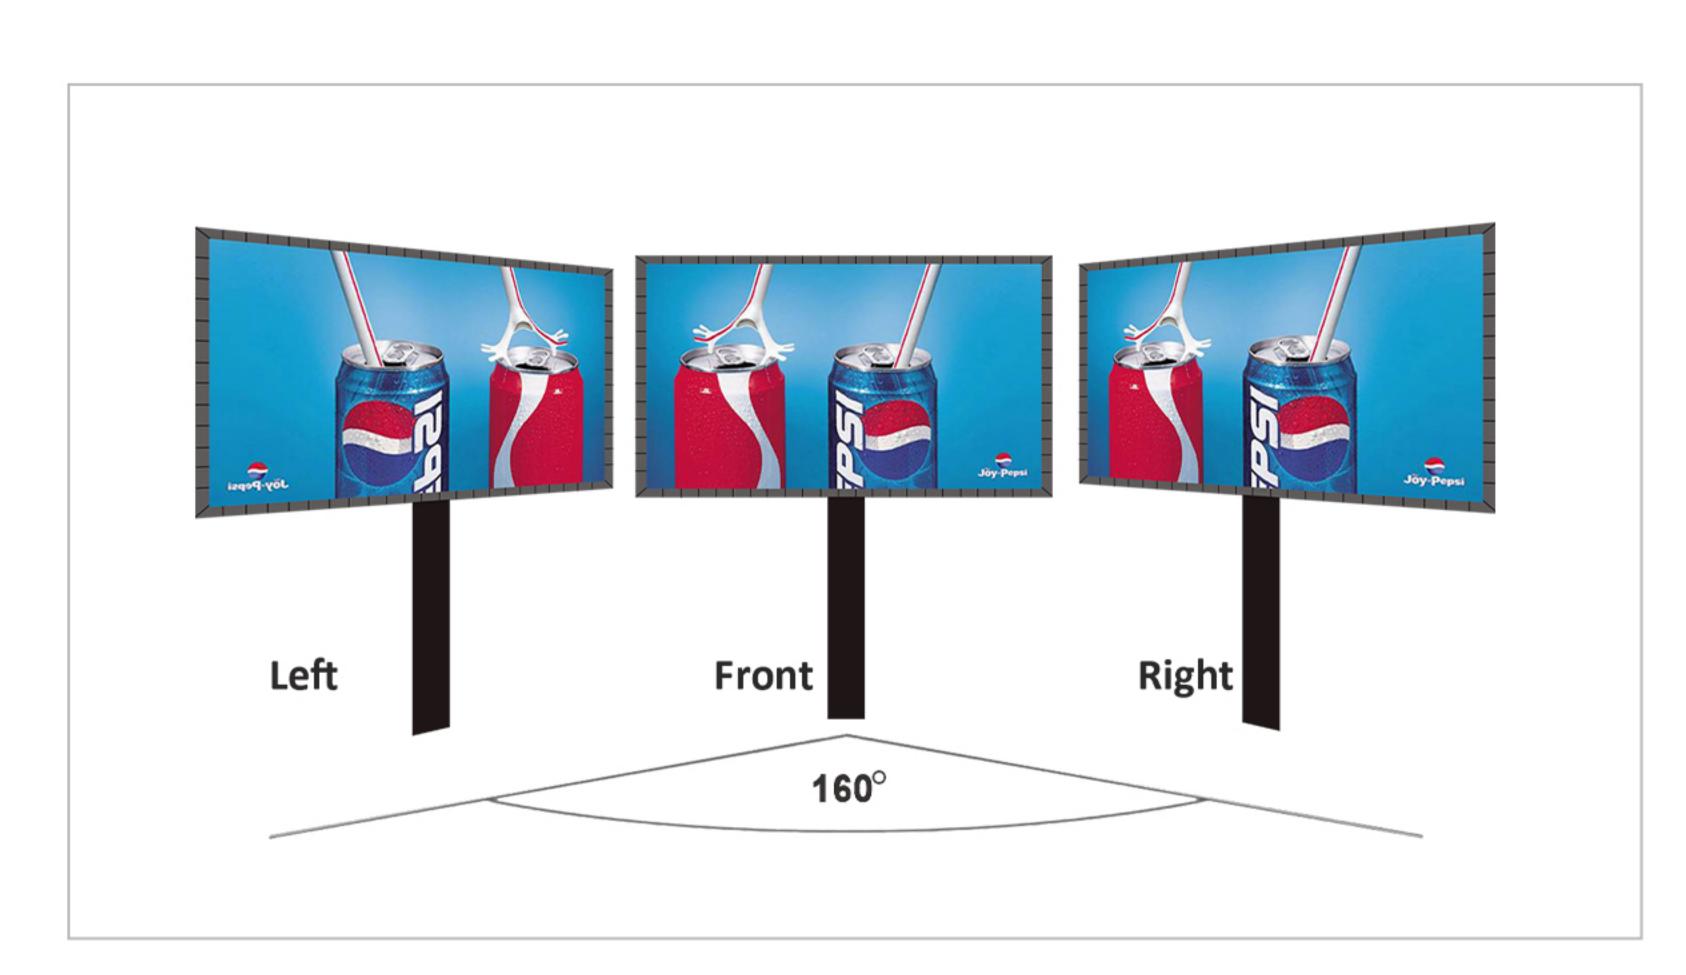

#### BIG VIEWING ANGLE

SRYLED outdoor LED screen has big viewing angle, we use big size LED lamps to meet customers request. You can see images with good visual effect from 160 degree angle.

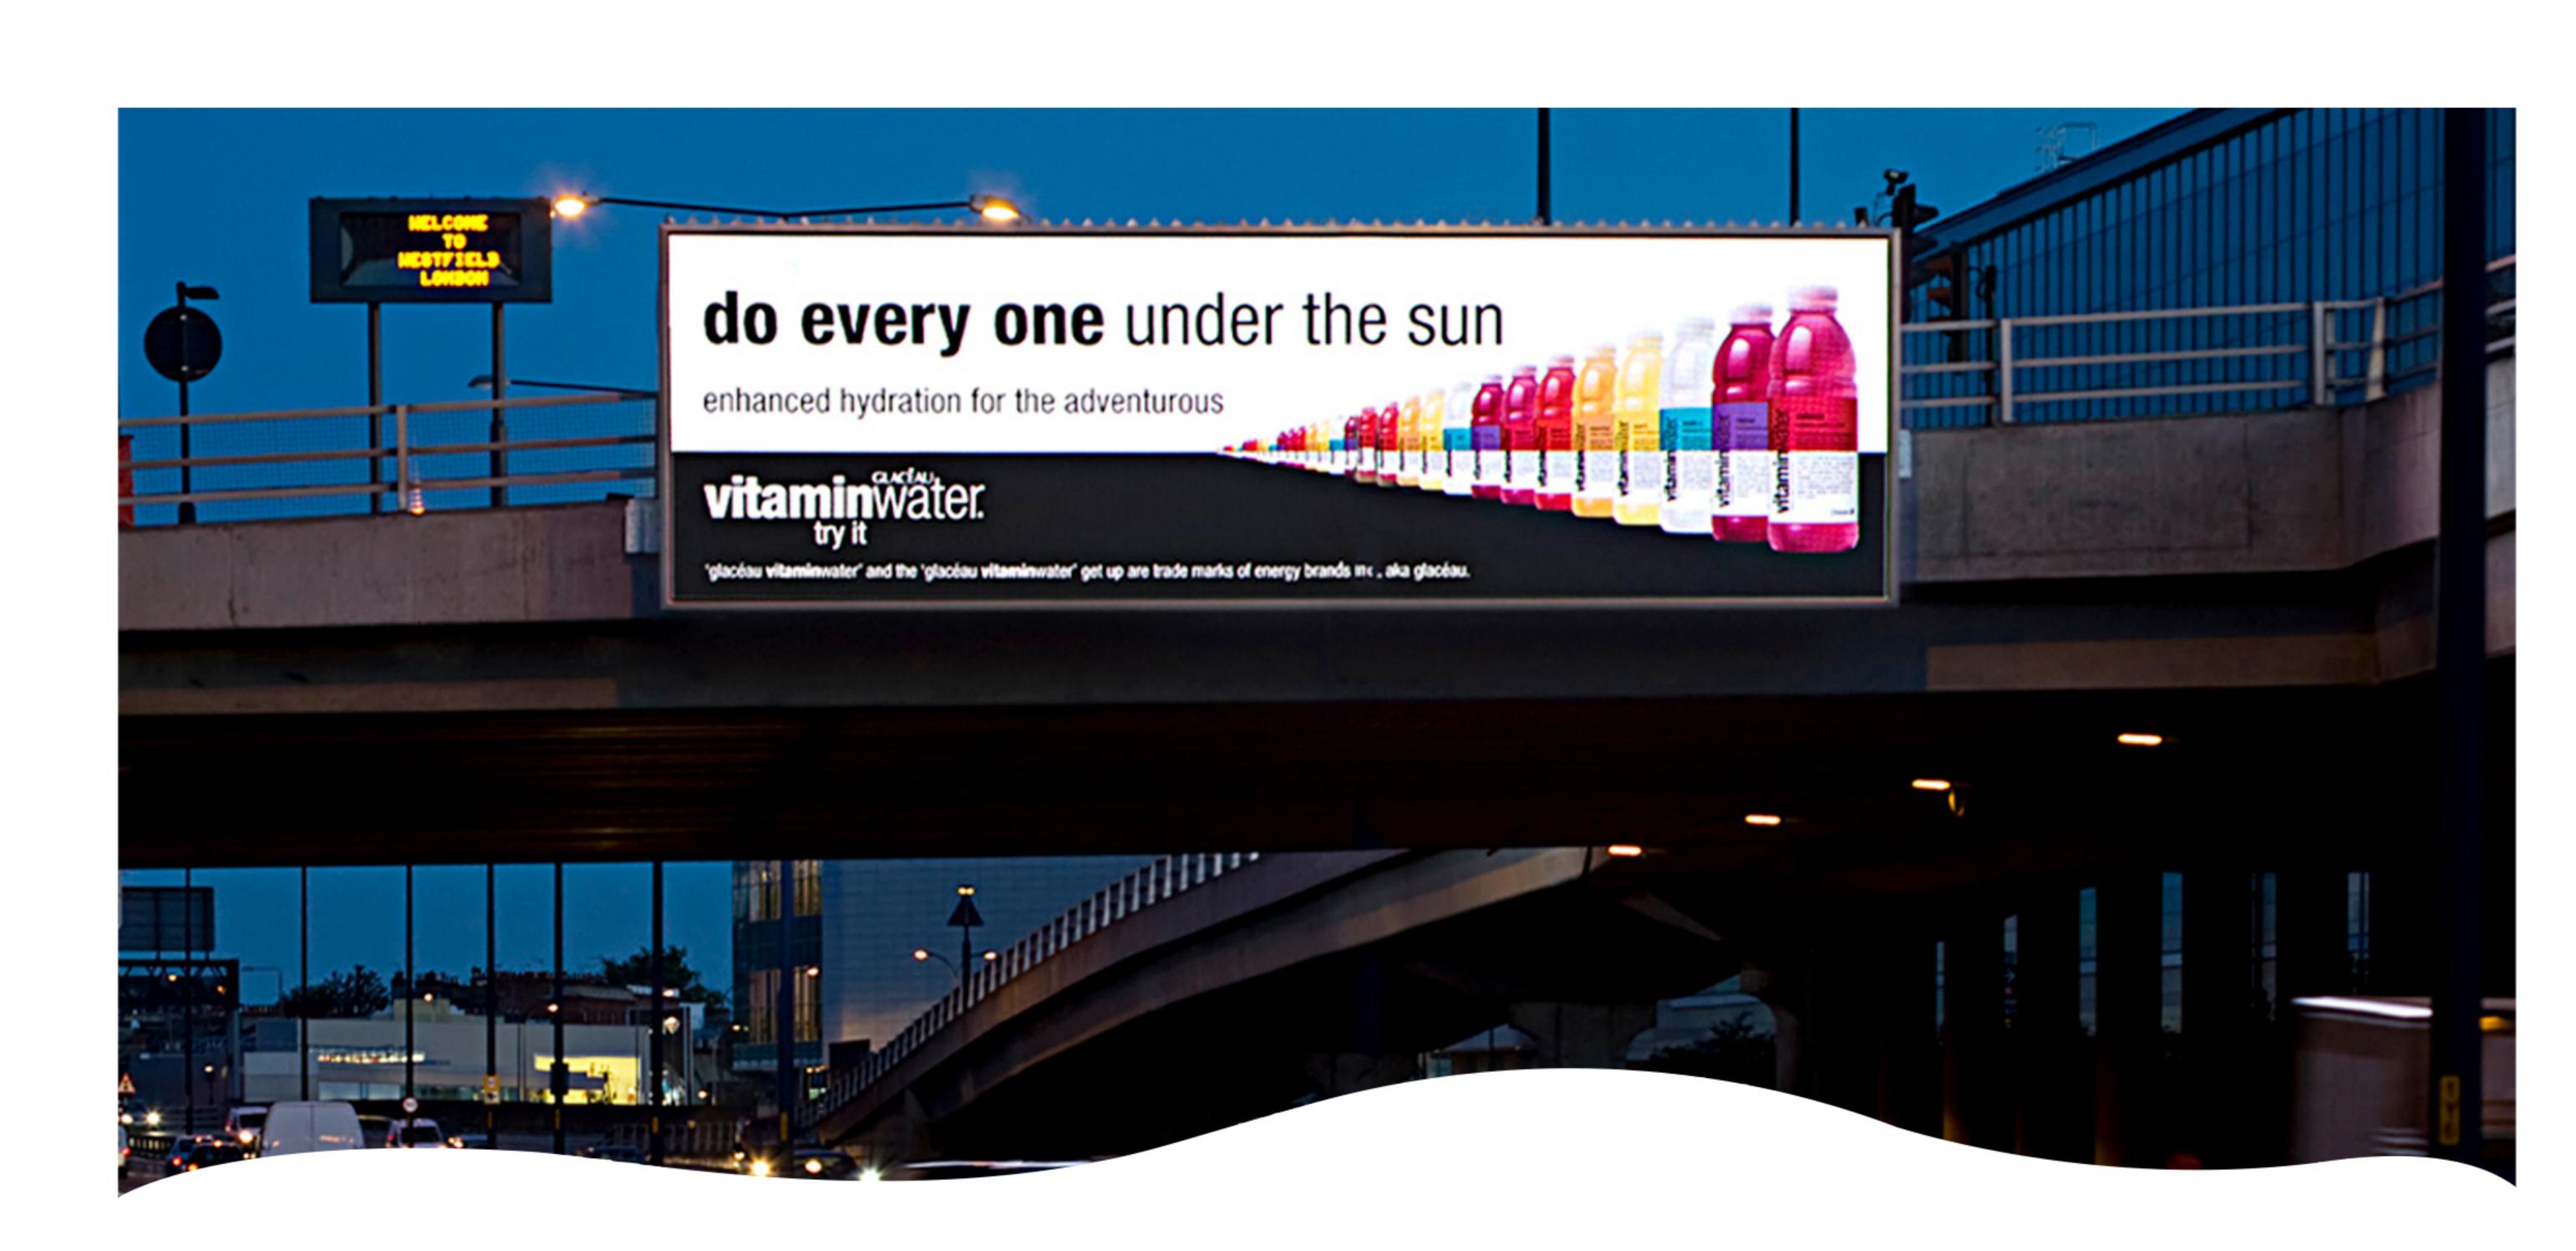





#### IP65 WATERPROOF GRADE

SRYLED outdoor LED display with high waterproof grade IP65, it can be used in strong rainy days and snowy days.


### DIFFERENT INSTALLATION WAY

SRYLED outdoor LED screen can installed by different ways. Below are several common installation ways. We can provide steel structure CAD drawing for you and assistant you assemble.

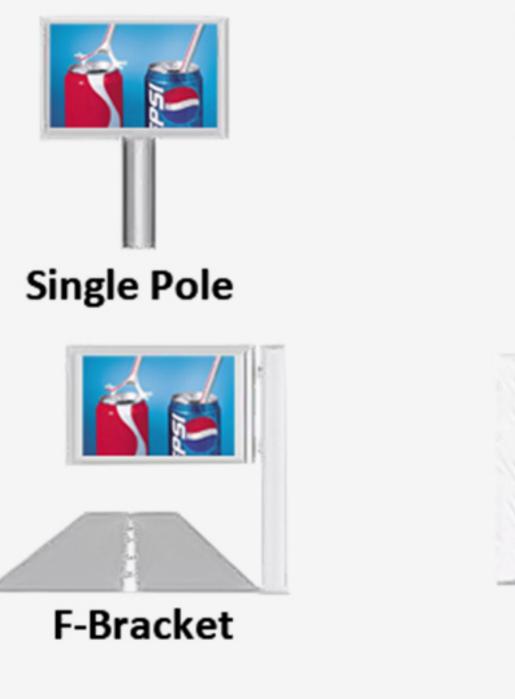

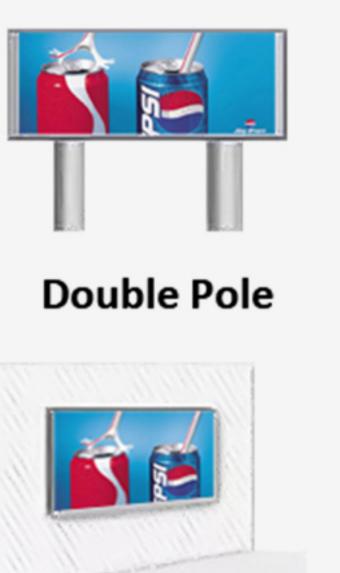

Wall Mount

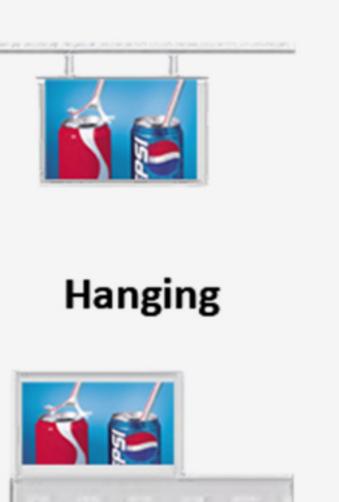

Roof Support



Gantry

SHENZHEN SRYLED PHOTOELECTRIC CO., LTD.

SRYLED

SRYLED

SRYLED

SRYLED