SRY-Sincere, Responsible, Young CE, RoHS, FCC, CB, ETL Certificated

#### Specification

	D4 05	DO 004	DO 04	D0.070	D2 47	D2 04
	P1.95	P2.604	P2.84	P2.976	P3.47	P3.91
Pixel Pitch	1.95mm	2.604mm	2.84mm	2.976mm	3.47mm	3.91mm
Density	262,984 dots/m <sup>2</sup>	147,928 dots/m <sup>2</sup>	123,904 dots/m <sup>2</sup>	112,910 dots/m <sup>2</sup>	83,050 dots/m <sup>2</sup>	65,536 dots/m <sup>2</sup>
Led Type	SMD1515	SMD1515	SMD1515	SMD2121/SMD1921	SMD1921	SMD2121/SMD192
Panel Resolution	256x256dots / 256x512dots	192x192dots / 192x384dots	176x176dots / 176x352dots	168x168dots / 168x332dots	144x144dots / 144x288dots	128x128dots / 128x256 dots
Drive Method	1/32 Scan	1/32 Scan	1/22 Scan	1/28 Scan	1/18 Scan	1/16 Scan
Best Viewing Distance	1.95-20m	2.5-25m	2.8-28m	3-30m	3-30m	4-40m
Waterproof Level	IP30				ront IP65, Rear IP54	
Refresh Rate	3840Hz					
Application	Indoor and outdoor					
Brightness	Indoor 800-1000nits, Outdoor 4500-5000nits					
Panel Size	500x500mm / 500x1000mm					
Panel Weight	7.6KG / 14 KG					
Input Voltage	AC110V/220V ±10%					
Max Power Consumption	800W					
Average Power Consumption	300W					
Life Span	100,000 Hours					



#### SRYLED - RT Series

RT series is SRYLED new designed rental LED display panel with unique feature and appearance, it is a cost-effective product.



Stage / Event / Concert LED Video Wall P1.95 / P2.604 / P2.84 / P2.976 / P3.47 / P3.91

# SRYLED Audio · Visual · Solutions

SHENZHEN SRYLED PHOTOELECTRIC CO., LTD.

Tel.:+86-755-84660806 Mobile/WhatsApp: +86-15013698328

Address: Building C, Huixin Industrial Park, Fuyong Town, Bao'an District, Shenzhen, China.



SRYLED

SRYLED

SHENZHEN SRYLED PHOTOELECTRIC CO., LTD.

Shenzhen Sryled Photoelectric Co., Ltd.


www.sryled.com

— Shenzhen Sryled Photoelectric Co., Ltd.

## SRYLED - RT Series


RT series is SRYLED new designed rental LED display panel with unique feature and appearance, it is a cost-effective product.




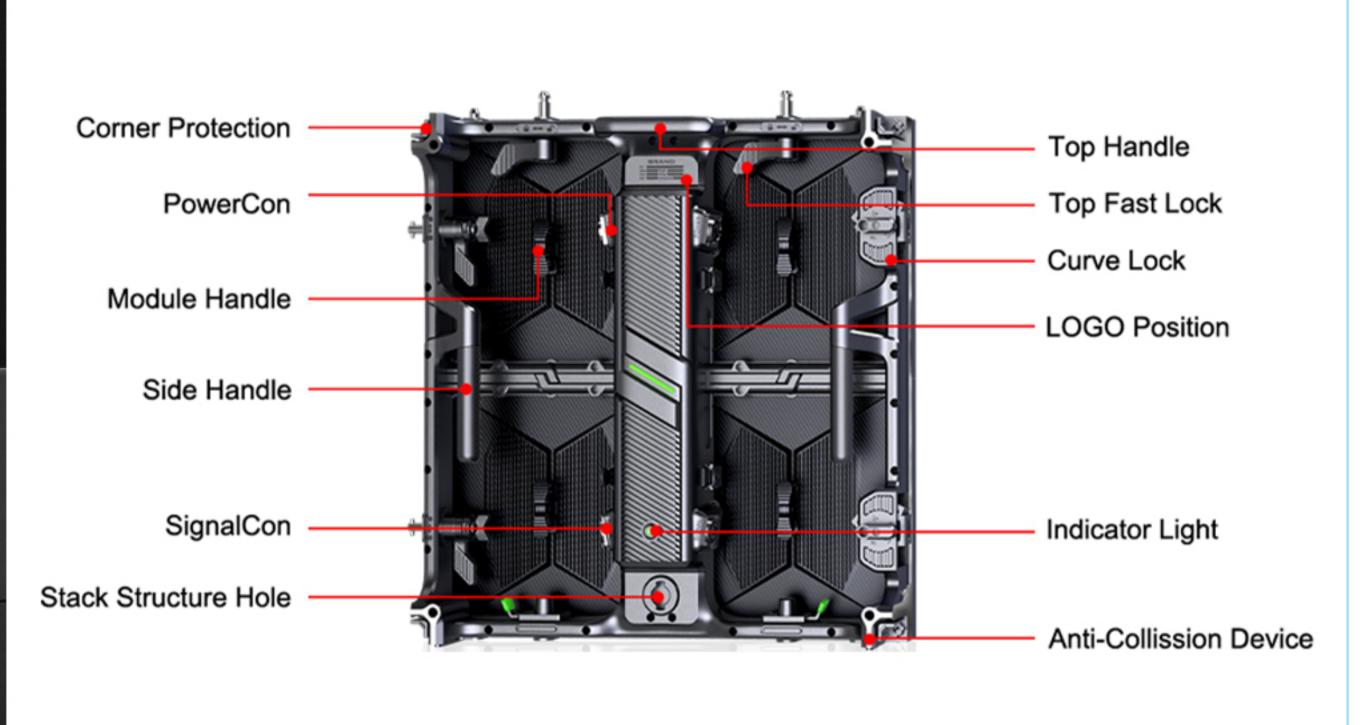

### MODULAR HUB DESIGN

RT series LED video panel is SRYLED new designed rental LED panel with independent back cover. LED modules are connected to HUB card without cables. Power supply, receiver card and HUB card can be easily took off, it making maintenance easier and faster.

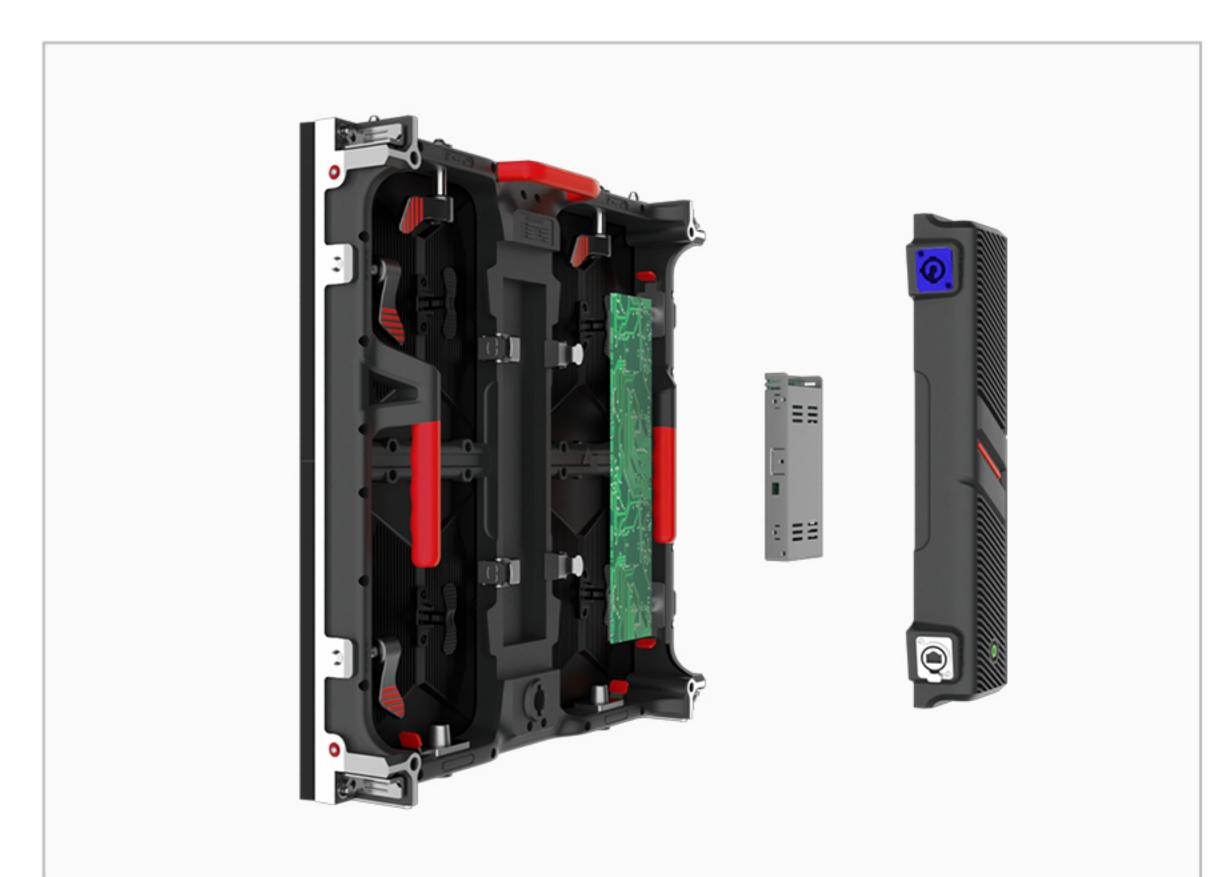

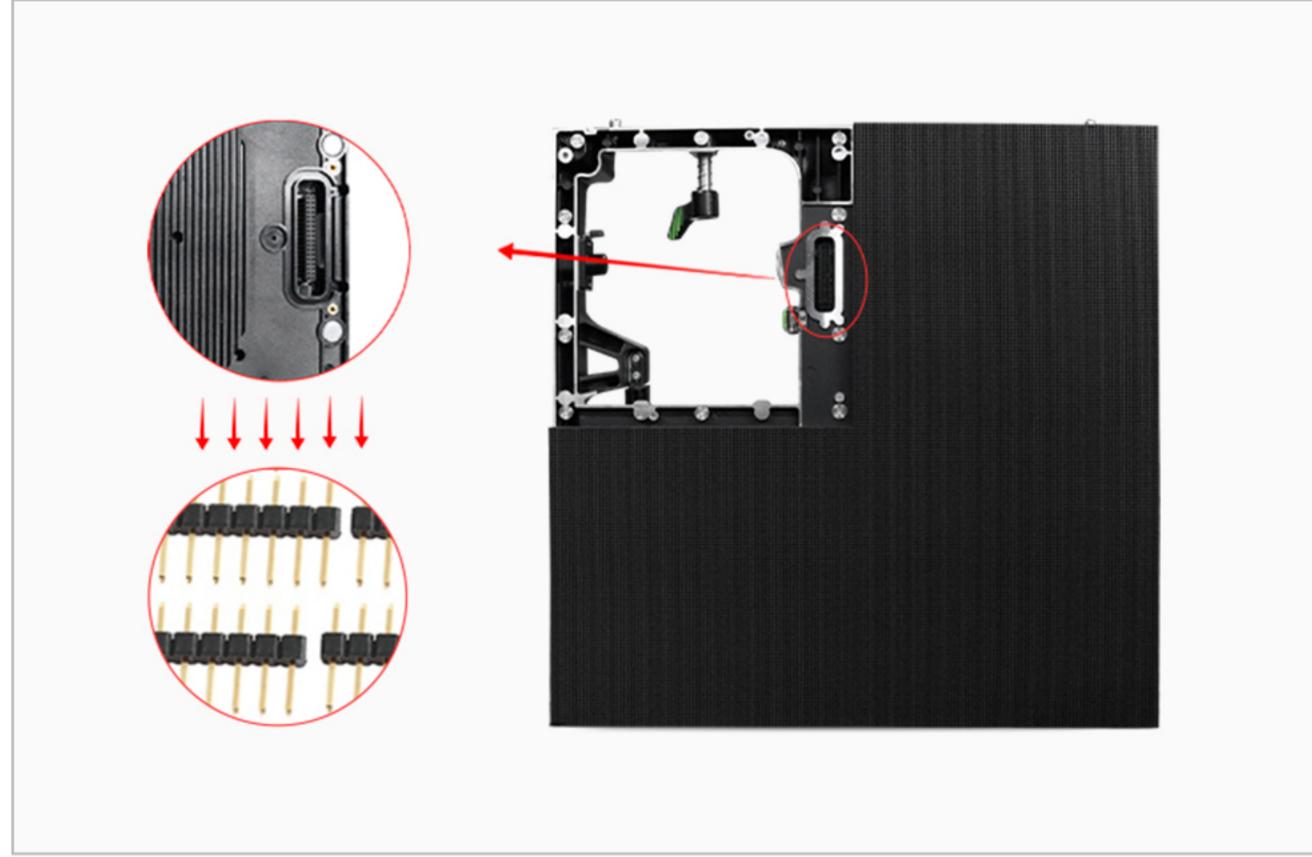

#### STABLE SIGNAL TRANSMISSION

RT LED panel HUB card pins are gold plated, its quality is very high.

Not like regular wired LED panel, RT LED panel has no data and power transmission problem.


#### HIGH QUALITY MATERIAL

RT PCB board consists of 8 layers of cloth (1.6mm), while regular PCB board has only 6 layers of cloth(1.2mm). RT PCB board has better heat dispassion, and it is fire retardant. With good quality PCB board, LED video wall will not have the problem that one line LED lamps always bright.







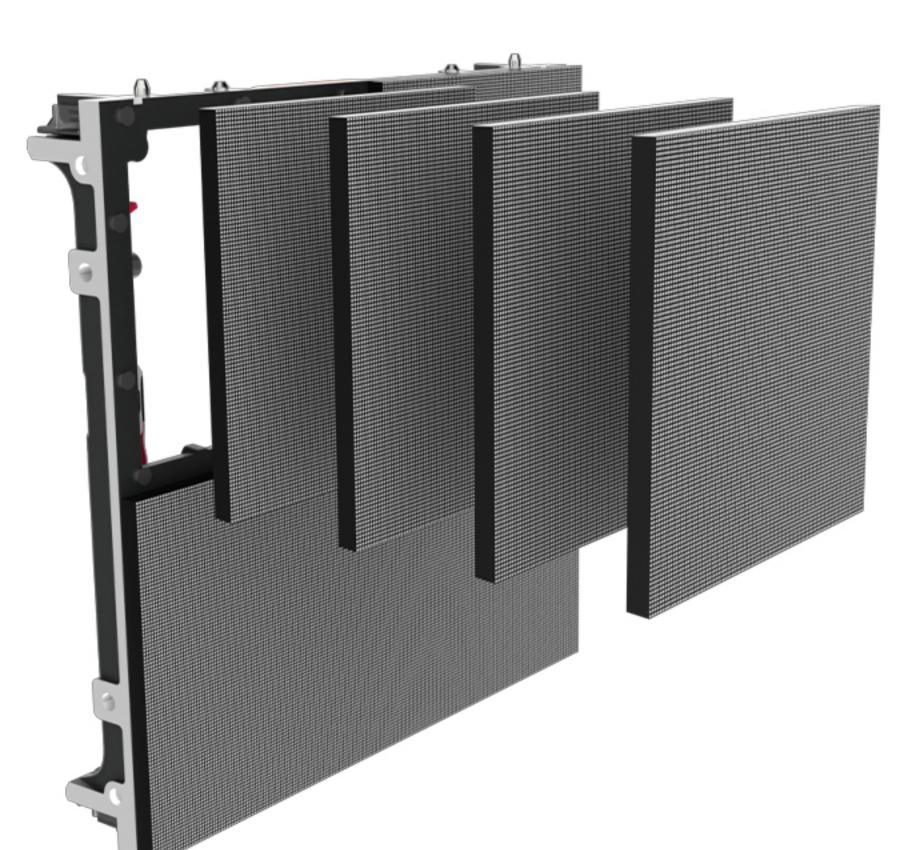


#### HIGH QUALITY MODULE

RT Series can suitable for different pixel pitch LED modules, and LED modules mask is oiled, making higher contrast ratio and higher uniform LED displays. Besides, the LED module has strengthen edge, whole LED display looks more flat.

### SUPPORT CURVED INSTALLATION

RT rental LED panel can make curved LED display and circle LED display, both concave and convex are okay, and 72 pcs LED panels can make a 360°circle LED screen.

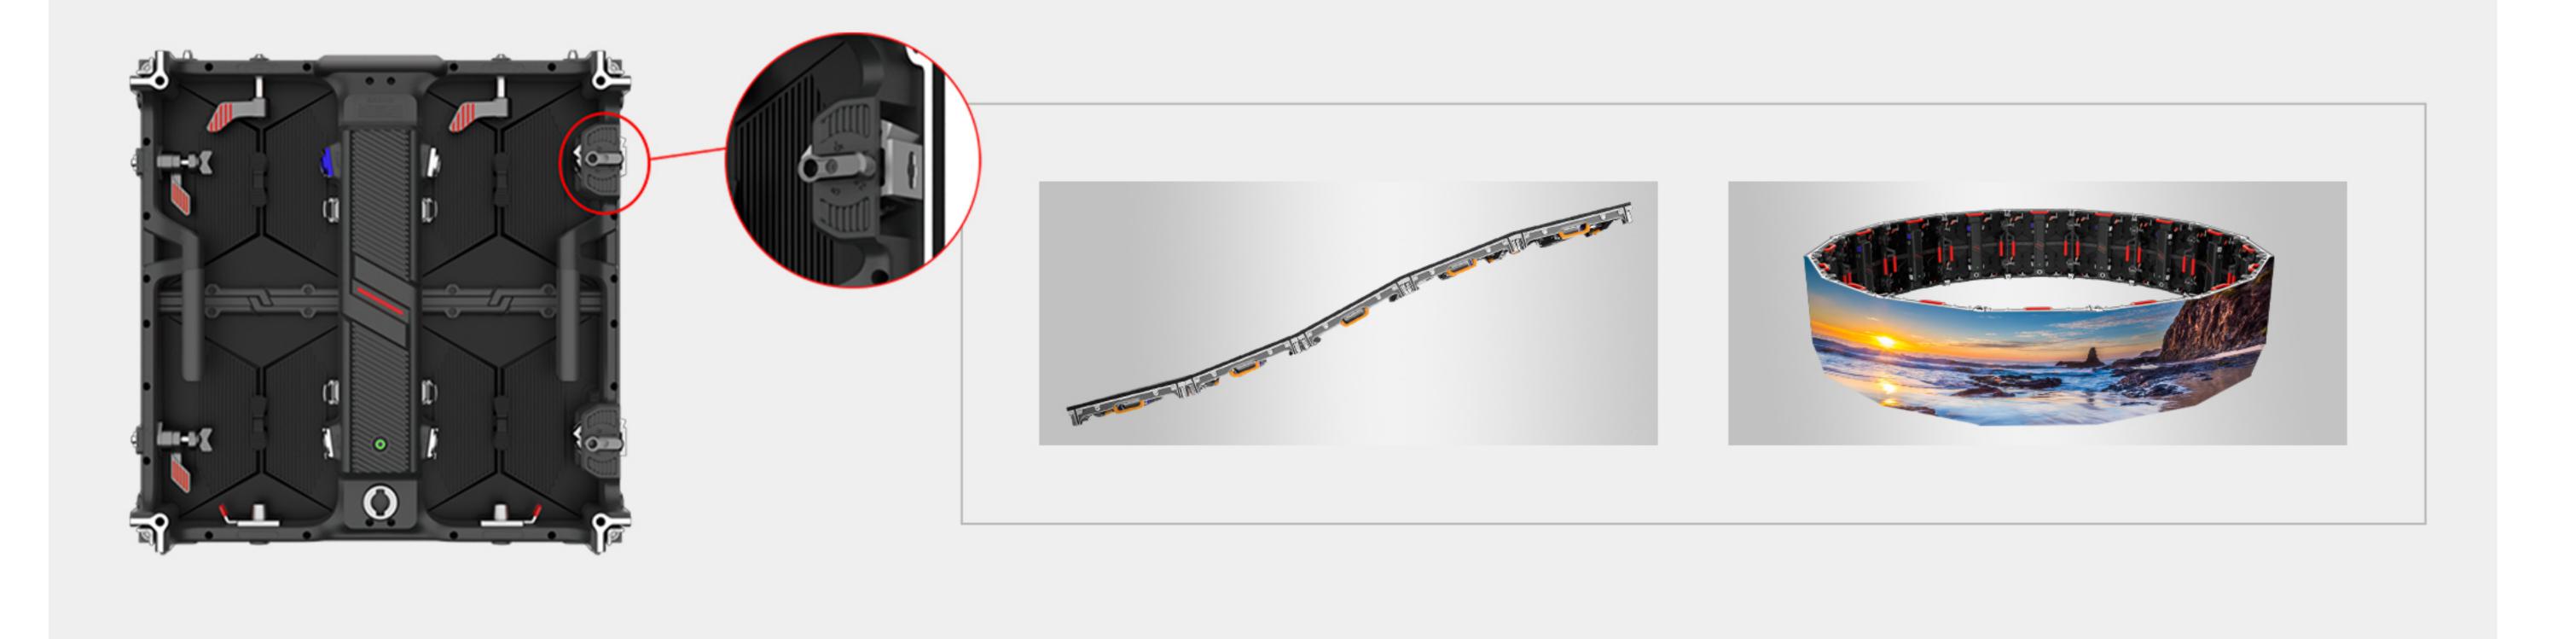

SHENZHEN SRYLED PHOTOELECTRIC CO., LTD.

SRYLED

SRYLED

SRYLED

SRYLED